

SPF12V260-ST Standard Type Battery

Group: 8D

LITHIUM IRON PHOSPHATE BATTERY

ELECTRICAL PERFORMANCE

Nominal Voltage	12.8 V
Nominal Capacity	260 Ah
Capacity @ 52A	300 min
Energy	3328 Wh
Resistance	≤8 mΩ @ 50% SOC
Self Discharge	<3% / Month
Cells	Cylindrical

CHARGE PERFORMANCE

Recommended Charge Current	52 A
Maximum Charge Current	130 A
Recommended Charge Voltage	14.6 V
BMS Charge Cut-Off Voltage	<15.6 V (3.9V/Cell)
Reconnect Voltage	>14.0 V (3.5V/Cell)
Balancing Voltage	<14.4 V (3.60V/Cell)
Maximum Batteries in Series	4

DISCHARGE PERFORMANCE

Maximum Continuous Discharge Current	150 A
Peak Discharge Current	300 A (3s)
BMS Discharge Cut-Off Current	450 A ±20 A (31 ms)
Recommended Low Voltage Disconnect	11 V (2.75V/Cell)
BMS Discharge Cut-Off Voltage	>8.0 V (3s) (2.0V/Cell)
Reconnect Voltage	>10.8 V (2.7V/Cell)
Short Circuit Protection	250 ~ 500 μs



MECHANICAL PERFORMANCE

Dimension (L x W x H)	520 x 268x 228 mm 20.5 x 10.6 x 9.0"
Approx. Weight	70.5 lbs (32.0 kg)
Terminal Type	T11
Terminal Torque	80 ~ 100 in-lbs (9 ~ 11 N-m)
Case Material	ABS
Enclosure Protection	IP65


TEMPERATURE PERFORMANCE

Discharge Temperature	-4 ~ 149 °F (-20 ~ 65 °C)
Charge Temperature	32 ~ 113 °F (0 ~ 45 °C)
Storage Temperature	23 ~ 95 °F (-5 ~ 35 °C)
BMS High Temperature Cut-Off	167 °F (75 °C)
Reconnect Temperature	149 °F (65 °C)

COMPLIANCE

Certifications	CE (battery) UN38.3 (battery) UL1642 & IEC62133 (cells)
Shipping Classification	UN 3480, CLASS 9

OUTLINE DIMENSION

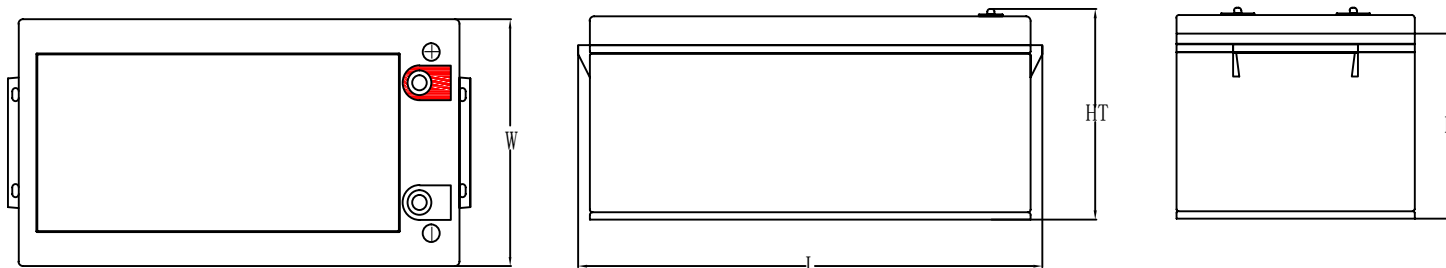




L mm(")	W mm(")	H mm(")	HT mm(")
520 (20.5)	268 (10.6)	221 (8.7)	229 (9.0)

Performance may vary depending on application. All specifications are subject to change without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.


**SPF12V260-ST Standard Type Battery**

**Group: 8D**

**PERFORMANCE CHARACTERISTICS**

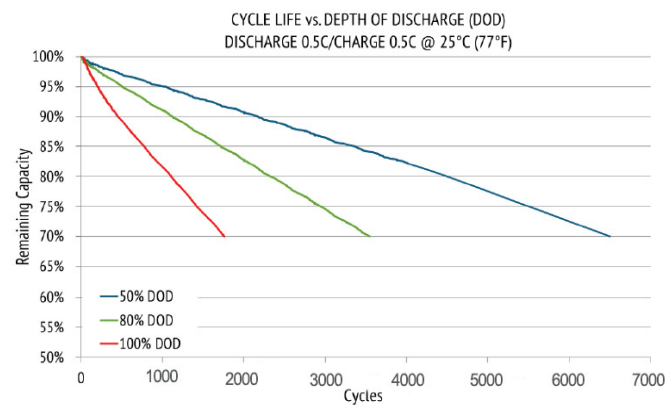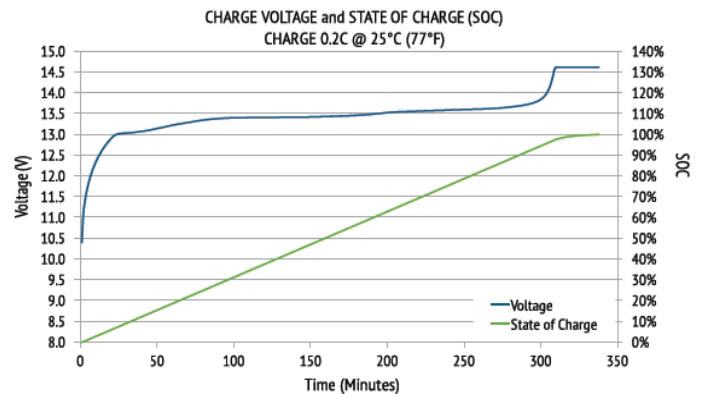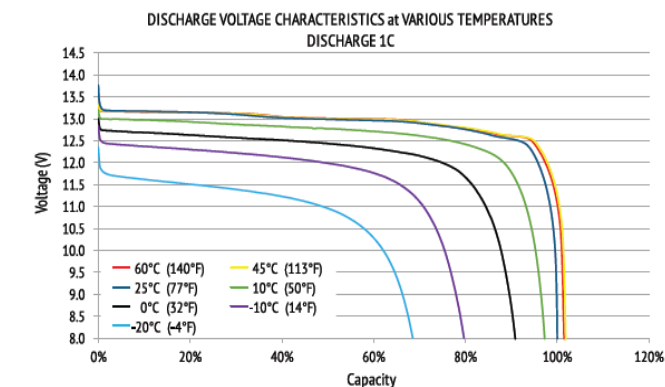

**Discharge characteristic at different rate at room temperature**

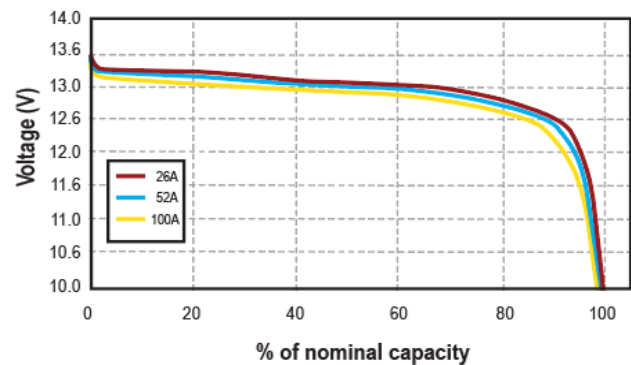

**FEATURES & BENEFITS**



**High cycle life**

>2000 cycles @80% DoD for effectively lower total cost of ownership.



**Longer service life**

Low maintenance batteries with stable chemistry.



**Built in circuit protection**

Battery Management System (BMS) is incorporated against abuse.



**Better storage**

up to 6 months thanks to its extremely low self discharge (LSD) rate and no risk of sulphation.



**Quickly recharge**

Save time and increase productivity with less down time thanks to superior charge/discharge efficiency.



**Extreme heat tolerance**

Suitable for use in a wider range of applications where ambient temperature is unusually high: up to +60°C.



**Lightweight**

Lithium batteries provide more Wh/Kg while also being up to 1/3 the weight of its SLA equivalent.

**APPLICATIONS**

Lithium Iron Phosphate can be used in most applications that use Lead Acid, GEL or AGM type batteries. Suitable applications include:

- Caravan
- Marine
- Golf Car
- Buggies
- Solar Storage
- Remote Monitoring
- Switching applications and more

**CAUTIONS**

- Do NOT short circuit, reverse polarity, crush or disassemble.
- Do NOT heat or incinerate.
- Do NOT immerse in any liquid.
- Store at 30~50% SOC. Recharging every 3 months is recommended. The storage area should be clean, cool, dry and ventilated.

Performance may vary depending on application. All specifications are subject to change without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.



+86-769-82260562



www.super-pack.com.cn



marketing@super-pack.com.cn